



**TDR TORCH & DRILL RESISTING** 









**TDR TORCH & DRILL RESISTING** 

MODEL

## **FEATURES**

- · Dual doubled yoked KABA X10 locks.
- · Overall door thickness of 180mm including a slab section of 55mm combining a lamination of alloy and refractory material to resist oxy acetylene and drill attack.
- · Emergency internal release mechanism fitted as standard.
- · Glass activated deadlocking relocking devices are provided within the door as standard.

## **RESISTING TO**

- Oxy-Acetylene attack
- Explosives and force
- Drills and abrasive grinders
- Pneumatic tools
- Hydraulic tools





Model	Clear Door Opening  Height mm   Width mm		Clear Masonry Opening Required Height mm Width mm		Weight
	neight iiiii	Widthilli	neight iiiii	Width IIIII	
G-CRD4A	1980	860	2060	1030	990kg


When ordering state if left or right hand hinging required and existing wall thickness.




**ALL CMI SAFES COME WITH A FIVE YEAR** WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.



Class A SCEC Strongroom Door and Frame designed to be fire resisting for one hour

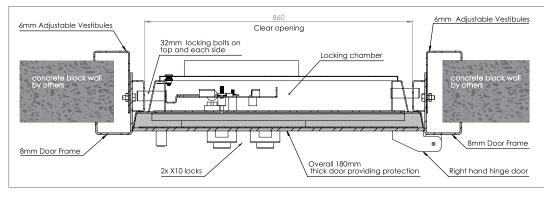



## **Supplied & Expertly Installed By:**



1300 764 971 www.safeguardsales.com.au