



SAFE & VAULT MANUFACTURERS



STRONGROOM DOOR & FRAME

AS1428.1 2009 APPROVED DOORS



MODEL
G-CDB4



AS1428.1 2009
approved doors



MADE IN AUSTRALIA



SAFE & VAULT MANUFACTURERS



STRONGROOM DOOR & FRAME

AS1428.1 2009 APPROVED DOORS

FEATURES

- Secured each side and top by 11 x 32mm locking bolts.
- Overall door thickness of 174mm including fire pan.
- Emergency internal release mechanism fitted as standard.
- Glass activated deadlocking devices are provided within the door as standard.
- Full hard plate protection over all vital areas.
- Several micro switches installed as standard to confirm status of all possible entry points.
- Locking by KABA X10 lock, no batteries required.

MODEL
G-CDB4



Model	Clear Door Opening		Clear Masonry Opening Required		Weight
	Height mm	Width mm	Height mm	Width mm	
G-CDB4	1980	860	2060	1020	495kg


When ordering state if left or right hand hinging required and existing wall thickness.



ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.



Class B SCEC Strongroom Door and Frame designed to be fire resisting for one hour

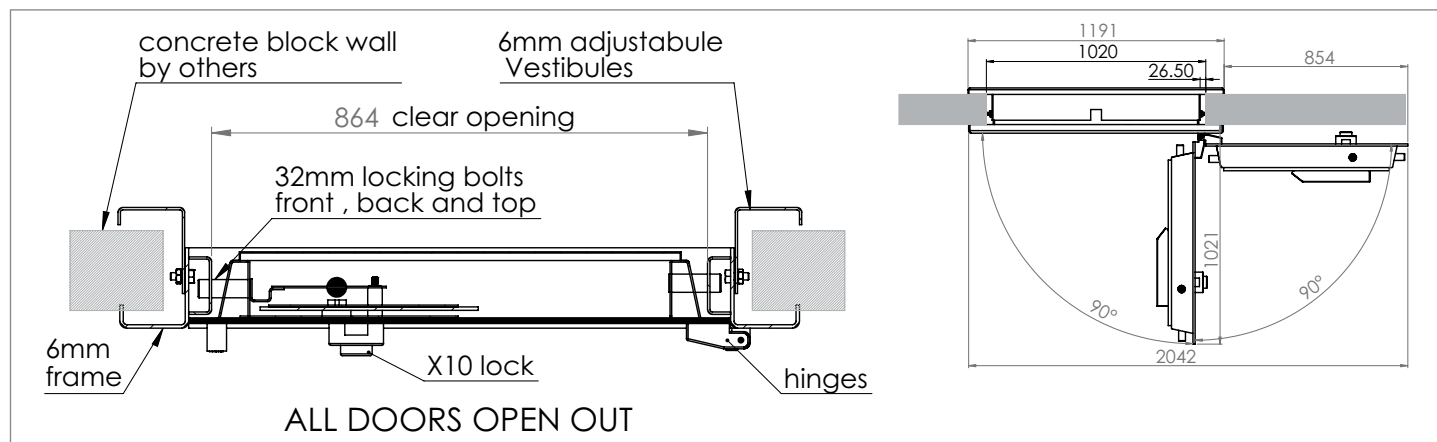

Supplied & Expertly Installed By:



1300 764 971

www.safeguardsales.com.au