



SAFE & VAULT MANUFACTURERS

BASIC GRADE STRONGROOM DOOR AND FRAME



[AS/NZS 3809 1998]



AS/NZS 3809
1998 approved
doors



Basic Grade
Strongroom Door
& Frame suggested
insurable cash rating
in unsupported (no
alarms) situation
is **\$20,000.**



MADE IN AUSTRALIA



SAFE & VAULT MANUFACTURERS

BASIC GRADE STRONGROOM DOOR AND FRAME



[AS/NZS 3809 1998]



DOOR: Total thickness 80mm. The “Basic” door provides a 6mm steel front section supported by a single mechanical relocking device.

BOLTWORK: Heavy 32mm diameter bolts of high grade steel provide two-way locking into the specially strengthened lock chamber sections at front and rear edges of the door.

FRAME: Heavy steel 4mm frame with 125 x 12mm threshold plate at bottom.

LOCKING: ROSS 700 9 lever pick resistant key lock.

HINGES: Adjustable heavy duty with hardened pins on ball bearing axis (pre-lubricated).

- Basic strongroom doors come in etch primer only.
- Door may be ordered with either left or right hand hinging.
- Digital combination, duress and time delay locks may be fitted as an optional extra.
- Internal release mechanism standard.




Model	Clear Door Opening		Clear Masonry Opening Required		Weight
	Height mm	Width mm	Height mm	Width mm	
BASICSRD4	1980	880	2060	1010	310kg

When ordering state if left or right hand hinging required and existing wall thickness.



ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.

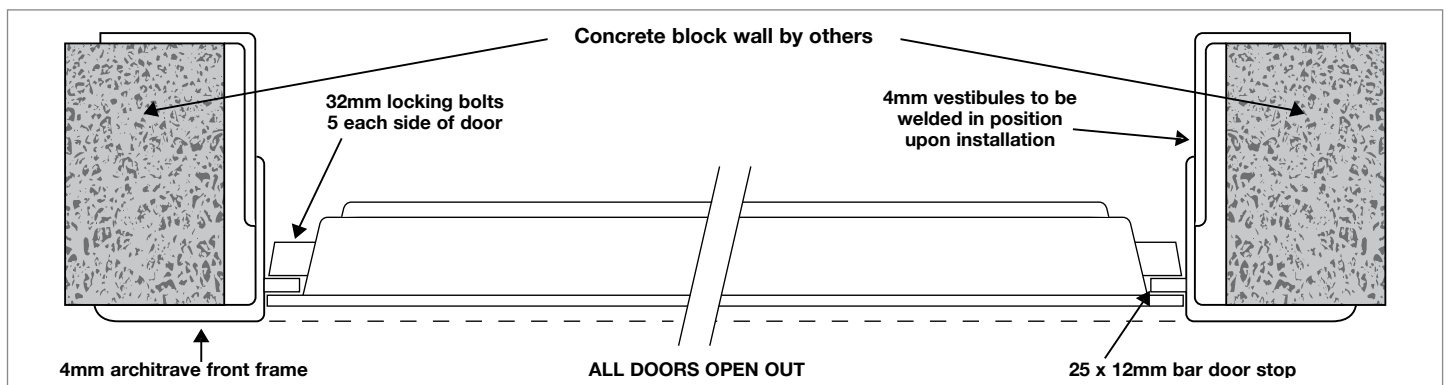

Supplied & Expertly Installed By:



1300 764 971
www.safeguardsales.com.au