



Internal Emergency Door Release



Strong Room Door & Frame

Commercial grade, 60 minutes fire resistant



The KS-SD Strong Room Door is easily fitted to a new wall or existing building, offering the flexibility to establish your very own Strong Room in your home or business.

SECURITY FEATURES


- Commercial UL digital lock and keypad
- Anti-tamper re-locking device on the lock
- Hardened anti-drill plate surrounding the lock
- External hinges with internal anti-pry dead bar
- Door thickness 110mm, 12mm steel plate
- Solid steel 32mm bolt-work
- 60 minutes fire resistant
- Internal release mechanism
- Durable hardened paint finish
- **Available in left or right hinged**
- Adjustable frame to suit wall thickness

PRODUCT SPECIFICATIONS

SHIPPING DIMENSIONS

Model	CLEAR DOOR OPENING MM	CLEAR MASONRY OPENING REQUIRED MM	Weight (kg)	Fire Rating w(mins)	H x W x D (mm)	Weight (kg)	Type
KS-SD	1890 x 857	1980 x 980	340	60	350 x 2200 x 1250	375	Crate

- The KS-SD can be fitted to a wall thickness range from 150mm to 230mm. If the wall thickness is greater than or less than this, packers and filler plates will be needed.
- Minimum clear masonry opening is 1930mm High x 960mm Wide
- Preferred clear masonry opening is 1980mm High x 980mm Wide

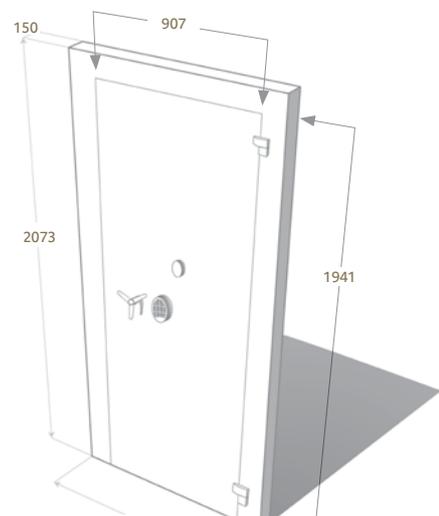

Authorised Supplier



Safeguard Safes
 safeguardsafes.com.au | 1300 764 971
 sales@safeguardgroup.com.au