BASIC GRADE STRONGROOM DOOR & FRAME











MADE IN AUSTRALIA



BASIC GRADE STRONGROOM DOOR & FRAME © (AS/NZS 3809:1998)

ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT AND TRAVELLING, WITH A 24 MONTH WARRANTY ON LOCKS.


C FEATURES

- **DOOR** Total thickness 80mm. The "Basic" door provides a 6mm steel front section supported by a single mechanical relocking device.
- **BOLTWORK** Heavy 32mm diameter bolts of high grade steel provide two-way locking into the specially strengthened lock chamber sections at front and rear edges of the door.
- LOCKING ROSS 700 9 lever pick resistant key lock.
- **FRAME** Heavy steel 4mm frame with 125 x 12mm threshold plate at bottom.

- **HINGES** Adjustable heavy duty with hardened pins on ball bearing axis (pre-lubricated).
- Basic strongroom doors come in etch primer only.
- No internal release mechanism provided with Basic Strongroom.
- Door may be ordered with either left or right hand hinging.
- Digital combination, duress and time delay locks may be fitted as an optional extra.





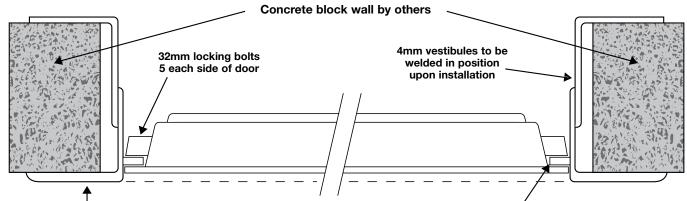

4mm architrave front frame

ALL DOORS OPEN OUT

25 x 12mm bar door stop

MODEL	PRICE INCL. GST	CLEAR DOOR OPENING		CLEAR MASONRY OPENING REQUIRED		WEIGHT	DELIVERY & INSTALLATION LEVEL
		HEIGHT	WIDTH	HEIGHT	WIDTH		ACCESS INCL. GST
BASICSRD4	\$	1980 mm	880 mm	2060 mm	1010 mm	310kg	\$

WHEN ORDERING PLEASE STATE IF LEFT OR RIGHT HAND HINGING REQUIRED AND EXISTING WALL THICKNES

N

Supplied & Expertly installed by:



1300 764 971 www.safeguardsafes.com.au

AUSTRALIA

CD RB 6/12/2018